


Note:  
Debur the inside edges of the stainless steel pipe to prevent damage to wire rope.

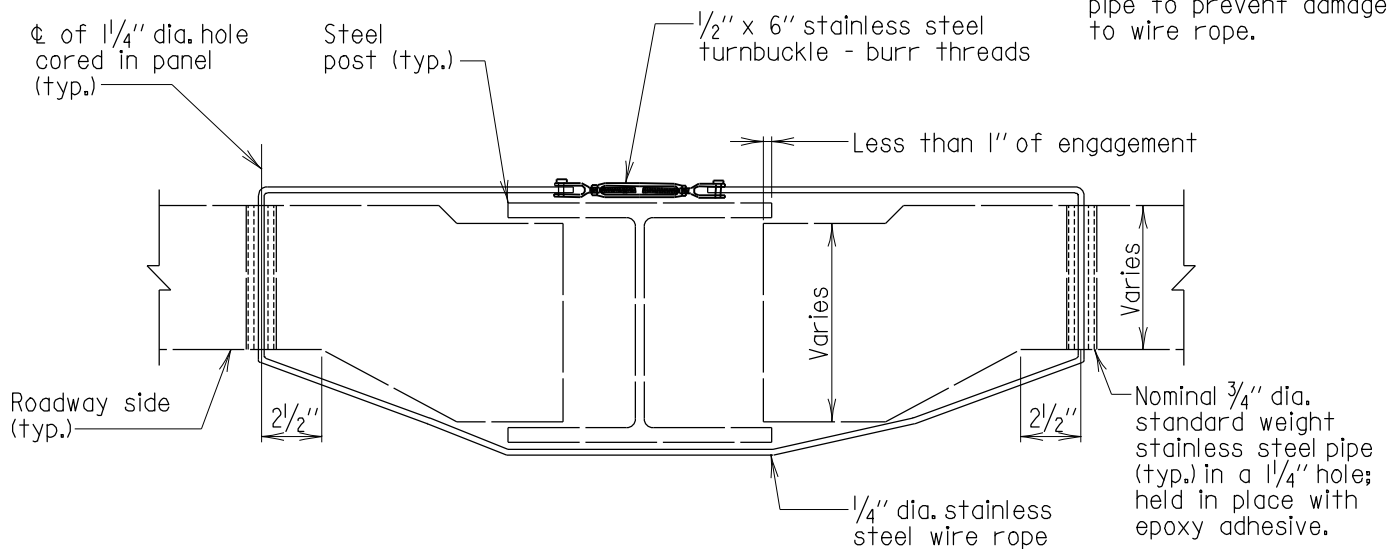

Note:  
On multi-sectional panels install a minimum of two panel restraints per section. Restraints shall be spaced a minimum of 1'-6" from the horizontal panel joint.

Noise Wall ID No:

Post No(s):

Direction for Counting Posts:

APPROVAL	
<i>L. S. Friedman</i>	DIRECTOR
OFFICE OF BRIDGE DEVELOPMENT	
DATE: 2/9/07	
REVISIONS	
SHA	FHWA

FHWA APPROVAL  
DATE:  

STATE OF MARYLAND  
DEPARTMENT OF TRANSPORTATION  
STATE HIGHWAY ADMINISTRATION  
OFFICE OF BRIDGE DEVELOPMENT

NOISE WALL PANEL RESTRAINT DETAILS  
STEEL POSTS

STANDARD NO. BR-SR(0,14)-07-382

SHEET 1 OF 1